

Control module

UNIcon universal control module with MODBUS Master function (2nd edition)



All ZIEHL-ABEGG sensors can be combined with the UNIcon CXE/ CXG universal control module. The actual value measured at the sensor is compared with the setpoint. This results in the 0-10 V output signal. Two 0-10 V outputs are integrated. These serve to activate EC fans, frequency inverters and other devices. Optionally, connected field devices can be activated by MODBUS-RTU. ZIEHL-ABEGG frequency inverters or ECblue fans can be conveniently addressed quickly and automatically. Universal control module also contains two separate control circuits, a real time clock and timer functions.

UNIcon universal control modules are especially suitable for the following applications: Refrigeration, air conditioning, general ventilation tasks, clean room technology. For applications in the areas mentioned, fast start-up is possible by selecting preset operating modes.

Input for sensors or speed settings through



Setting of the desired speed through device or by external default, e.g. 0...10 V



Connecting pressure sensors (refrigeration), e.g. type MBG.. sensors, measuring range 0...30 bar, 0...50 bar



Connection of thermistors, e. g. sensors type TF.. e. g. active sensor type MTG..



Connecting differential pressure sensors (air conditioning), e.g. type MPG.. sensors, measuring range 0...6000 Pa, acquisition of volume flows up to 65000 m³/h




Connecting air velocity sensors, e.g. type MAL.. sensors, measuring range 0...1 m/s, 0...10 m/s



Connecting additional sensors, e.g. combination sensors, CO₂, sensor signal 0...10 V / 0...20 mA / 4...20 mA

Connection diagram

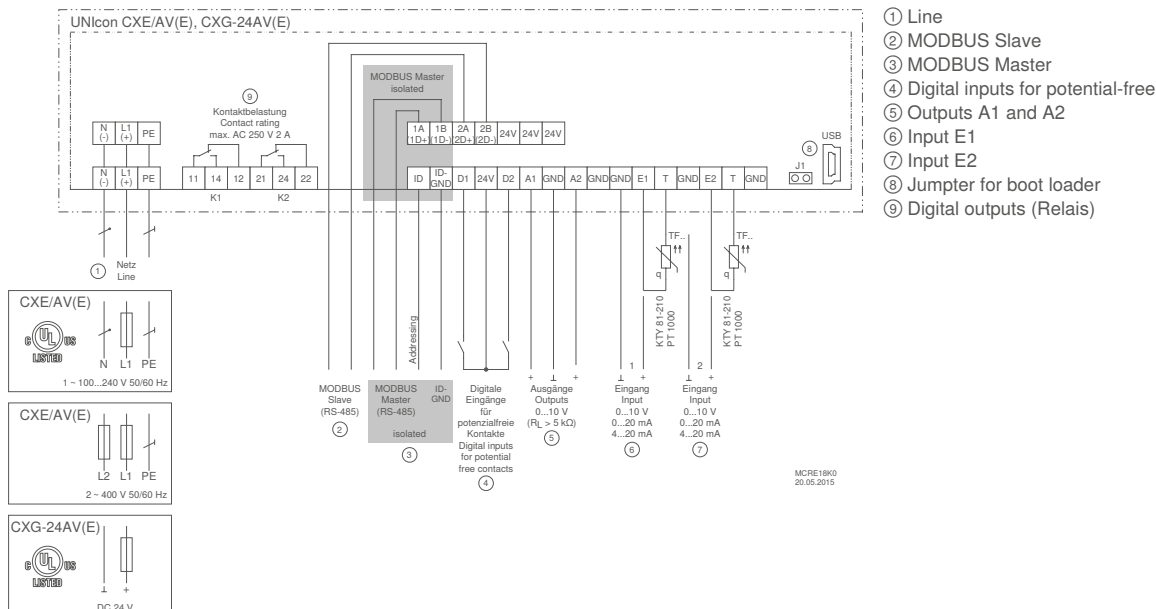

Standard conformity

Interference emission according to EN 61000-6-3 (domestic)
Interference immunity according to EN 61000-6-2 (industrial)

Equipment/properties

Multifunction display with clear text display:

Different menu languages are selectable

Simple commissioning by operating modes:

Typical operating modes, e.g. for air-conditioning, refrigeration or ventilation technology can be selected.

Activation of a second control circuit in the selected operating mode:

By assignment of the sensor function input 2 (E2) for the second control circuit.

Simple programmability:

e. g. setting of a minimum speed, limitation of the maximum speed, inversions and limits.
Setting, e.g. for 2-step mode

2 analog inputs for sensors or setting signals:

Analog input E1 and E2: Setting by operating modes or manually programmable, e.g. 0-10 V, 0-20 mA, 4-20 mA

Analog input E2: programmable, e.g. comparison with sensor 1, difference to sensor 1, average value formation, setpoint setting, setpoint adaptation (e.g. outside temperature-dependent)

2 digital inputs D1, D2:

Programmable, e.g. enable, switch over setpoint 1 or 2, switch-over control or manual mode, switchover E1 or E2, control function reversal, output limitation, display of external fault

2 analog outputs for controlling external speed controllers, EC fans, other devices:

Analog output A1 and A2: Setting by operating modes or manually programmable, e.g. output signal proportional to modulation, output signal proportional to input signal, invertible, 10 V constant voltage, group control

2 digital outputs (relays) K1 and K2:

Setting by operating modes or manually programmable, e.g. operating indication, fault indication, limits, external fault at digital input, activation of external devices, e.g. heating, group control fans, etc.

2 interfaces RS485:

③ For connecting ZIEHL-ABEGG field devices with MODBUS RTU interface (e.g. field devices with integrated add-on module "AM-MODBUS"). With the possibility of automatic addressing of these field devices.

② MODBUS Slave function of the UNIcon, for connection to a master control station (GLT).

Set protection/memory for settings:

Activation of set protection against unauthorised access, restoration of made settings

Event memory:

Query of occurred events, operating times etc.

Integrated real-time clock with timer:

The timer function behaves like a digital input, the desired function can be selected accordingly. Up to four switching times per day can be set for the desired function.

Optional equipment

Z-Modul-B02, article no. 380099, as additional I/O expansion.

- Two additional inputs E3 + E4 (0-10 V), option to program as digital inputs (see inputs D1,D2)
 - One additional analog output (0-10 V), adjustable (see output A1, A2)
- AM-BACNET-U, article no. 349088, for integration of the UNIcon MODBUS Master 2nd edition into BACNET networks.

Information

Motor protection

Fcontrol, lcontrol

UNIcon

Acontrol, Ucontrol, Dcontrol

Transformer

System components

Appendix

UNIcon universal control module, with UL authorisation (2nd edition)							
1~ 100...240V 50/60Hz							
Type	Article no.	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	W	°C		kg	mm
CXE/AV	320066	10	10	55	IP54	0.63	166 x 175 x 60
CXE/AVE	320067	10	10	55	IP00	0.55	182 x 118 x 57.5

UNIcon universal control module, with UL authorisation (2nd edition)							
24 V DC, max. 70 mA							
Type	Article no.	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	W	°C		kg	mm
CXG-24AV	320068	10	10	55	IP54	0.60	166 x 175 x 60
CXG-24AVE	320069	10	10	55	IP00	0.52	182 x 118 x 57.5

UNIcon universal control module, without UL authorisation (2nd edition)							
2~ 400V 50/60Hz							
Type	Article no.	Max. line fuse	Max. heat dissipation	Maximum ambient temperature	Protection class	Weight	Dimensions (W x H x D)
		A	W	°C		kg	mm
CXE/AV	320070	10	10	55	IP54	0.74	166 x 175 x 60