


Duty Point Overview

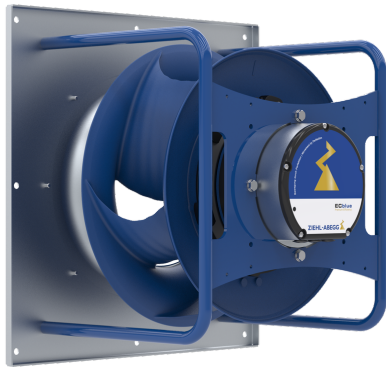

Typ: GR35I-ZID.DG.CR
Article number: 116893/A01

ZIEHL-ABEGG Contact

USA ZIEHL-ABEGG Inc.
4971 Millennium Dr.
Winston-Salem, NC 27107
USA
Phone +1 336 8349339
Fax +1 336 8349340
www.ziehl-abegg.us
info@ziehl-abegg.us






This document does not replace the technical product specification. It is intended solely as non-binding guidance regarding the information shown in the table of contents, in particular duty point data, characteristic curves and drawings. It is recommended that the technical product specification be agreed or accepted separately after this document.

1. Technical Data


Article number	116893/A01
Type key	GR35I-ZID.DG.CR
Designation	Ventilation unit with impeller with backward curved blades.
Fan design	with D flange
Rated values	3~380-480V 50/60Hz P_{ed} 3.30kW 5.40-4.20A 3410min ⁻¹ 50°C
Electrical connection	Integrated controller
Conformity	ErP 2015, ErP2026-Status: Compliant (complete fan)
ErP Data	Measurement category ErP: A Air flow q_v on Eta opt: 5473 m3/h Pressure increase p_{fs} on Eta opt: 1498 Pa Input power P_1 on Eta opt: 3322 W Efficiency H_{statA} : 74.0 % Efficiency grade: $N_{actual} = 79.0 / N_{target} = 62^*$ *ErP 2015
Thermal class	THCL155
Efficiency class	IE5
IO-function	BASIC-MODBUS
Type PFC integrated	no PFC
Painting motor	Stator/rotor separately
Painting rotor	Rotor 1 coatpaint resistance class 1 (L-TI-0596)
Colour rotor	RAL 5002 (ultramarine blue)
Material rotor	Aluminium
Painting impeller	unpainted
Colour impeller	like RAL 5002 (ultramarine blue)
Material blades/impeller	Impeller made of ZAmid
Inlet nozzle	Inlet nozzle with measuring device for volume flow
Mater. inlet nozzle	Inlet nozzle made of galvanised sheet metal
Painting inlet nozzle	unpainted
Connection diagram	Connection diagram: AP00001C
Motor protection	integrated active temperature management
Type of protection	IP55
Impregnation	Moisture and hot climate protection
Quality of bearings	ball bearing with long-time lubrication
Labelling UL/CSA	E213826 ZC-155, MK116-0013
Colour motor	Stator/rotor separately
Rating plate	1x fixed.
Condens. drain holes	Condensation drain hole rotor open
Special bearing	With grooved ball bearing with O-ring
Direction o.rotation	clockwise seen at rotor.
Fitting pos./intake direction	Fitting position H/Vu/Vo
Weight	23.00 kg
Min. operating temperature	-20°C
Disclaimer CT20/DOE	This product complies with the U.S. DOE fan and blower regulation. Due to CT20 regulations for industrial fans and blowers in California, please verify local compliance with your regional representative.

3. Characteristic Curve

Measured in standard nozzle in installation type A according to ISO 5801
1.16 kg/m³

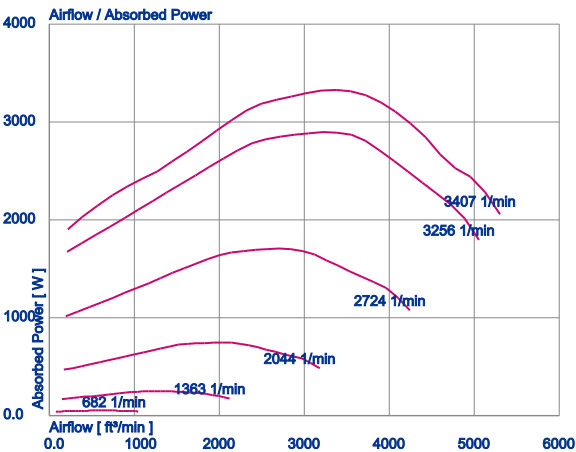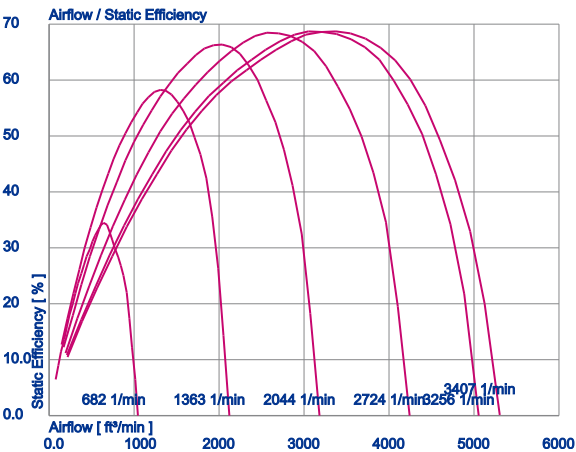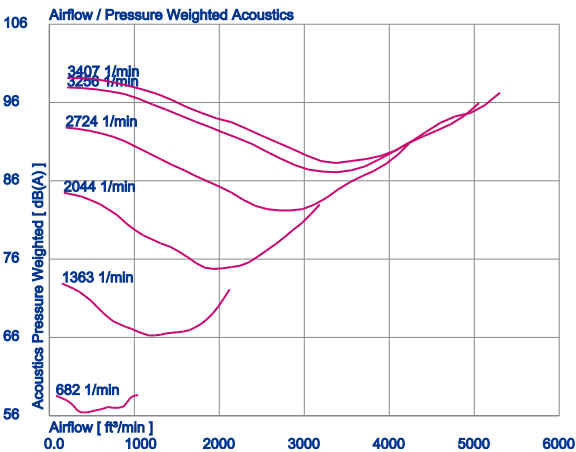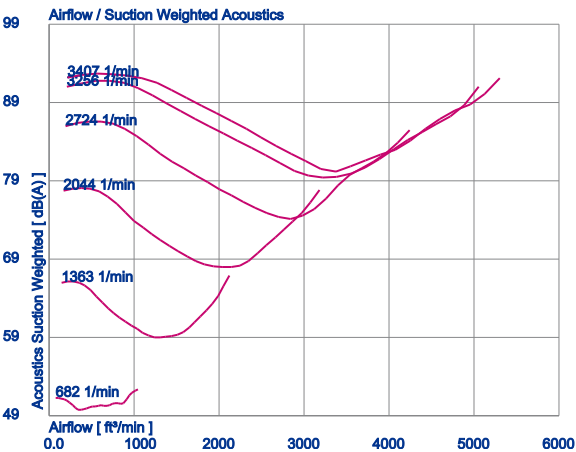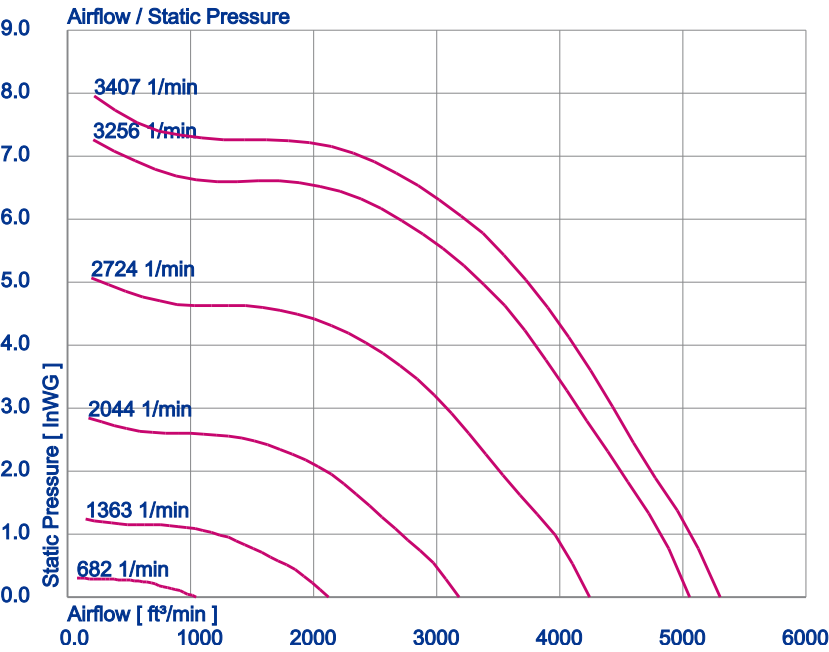

4. Drawing

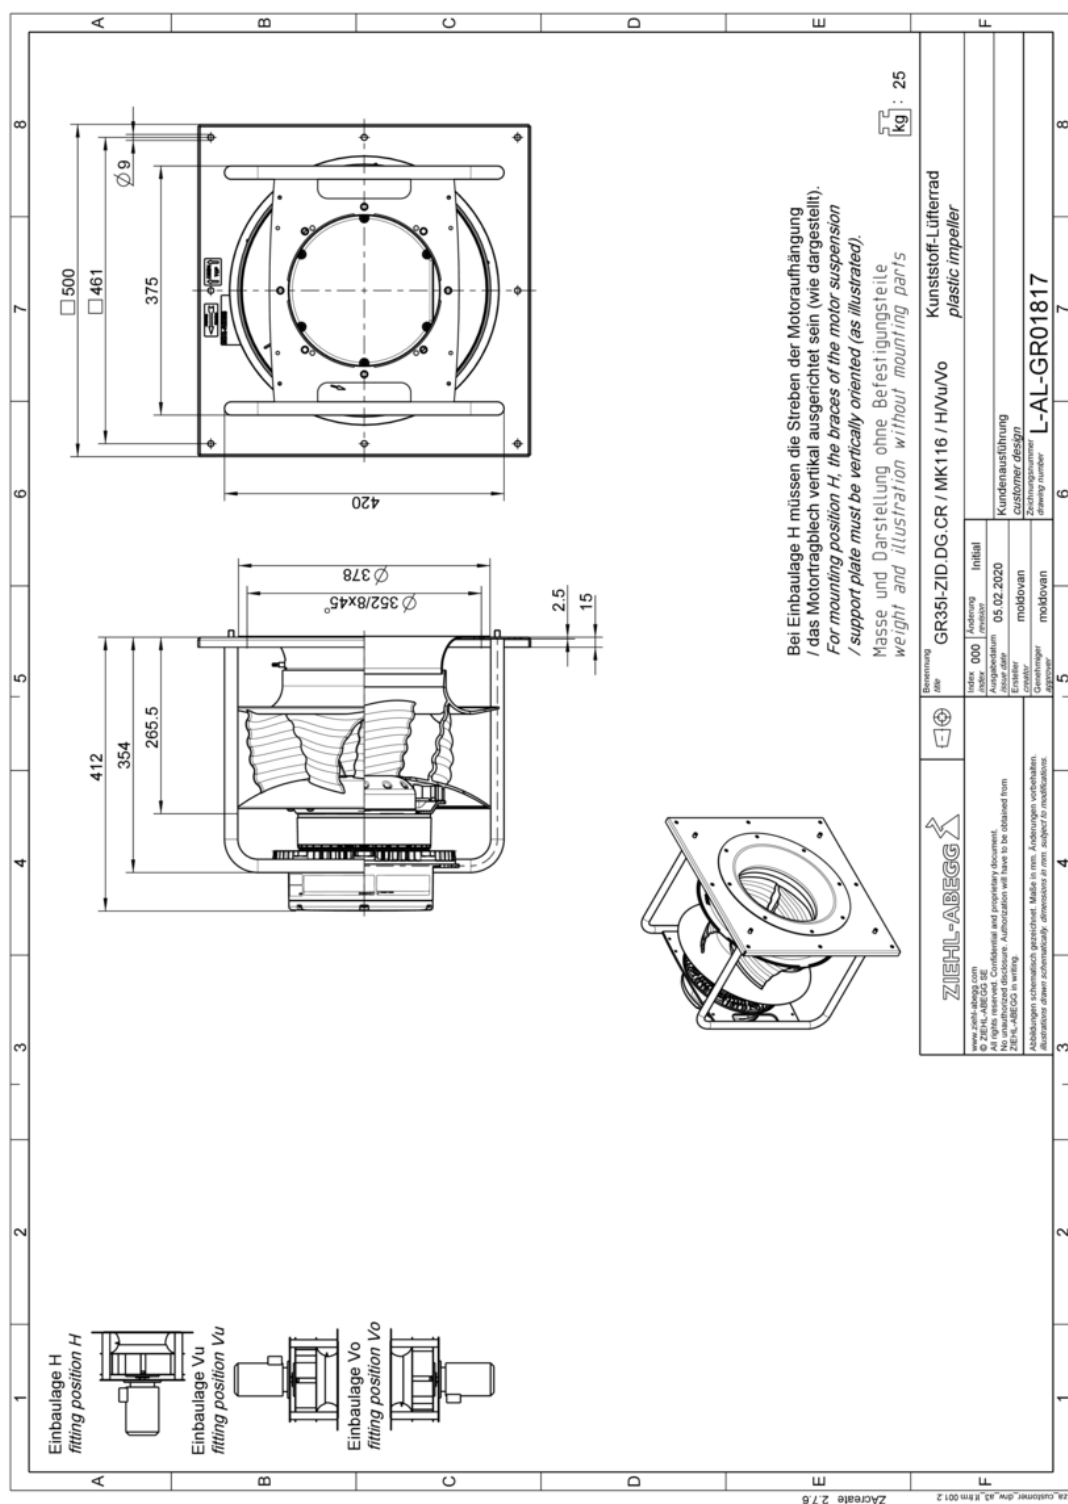


Dimensions in mm The illustrations shown make no claim to completeness and are for orientation purposes only.

5. Connection Diagram

Article number

116893/A01

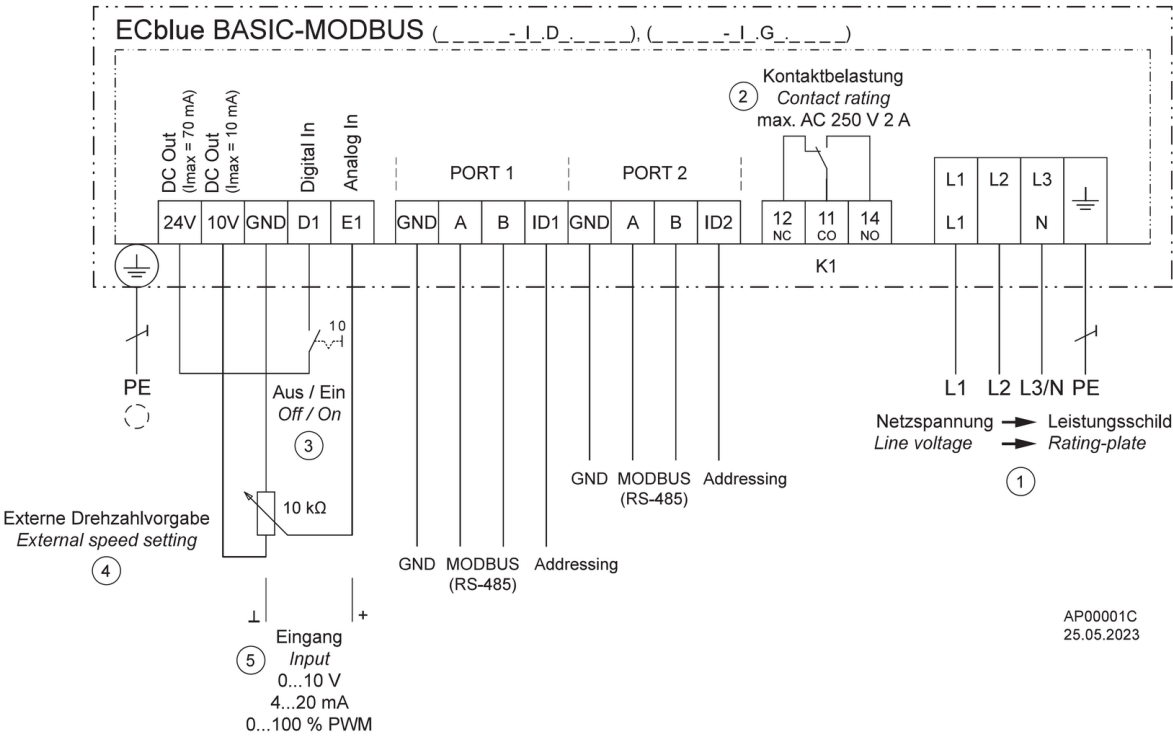

AP00001C
25.05.2023

www.ziehl-abegg.com © ZIEHL-ABEGG SE All rights reserved. Confidential and proprietary document. No unauthorized disclosure. Authorization will have to be obtained from ZIEHL-ABEGG SE in writing.	Index	003	Änderung	Benennung / title
	index		revision	
	Ausgabedatum		25.05.2023	Anschlussplan <i>connection diagram</i>
	issue date			
	Ersteller		langm	
creator				
ZIEHL-ABEGG				AP00001C